

GN-IOAO2LHV-MIMO

MIMO Omni Linear H/V / 698-960, 1695-2700 MHz / 3, 6 dBi / 360°

In-building Omni


Frequency Range

698-960	1695-2700
---------	-----------



Model No.	GN-IOAO2LHV-MIMO		
Frequency Range (MHz)	698-960	1695-2700	
Gain (dBi)	2.8 - 4.3	3.5 - 6.5	
Isolation (dB)	19	20	
VSWR	< 1.8:1	< 1.7:1	
Polarization	Linear H/V		
Intermodulation IM3 (dBc)	< -153 (2x43 dBm carrier)		
Impedance (Ω)	50		
Max. Effective Power per Port (watts)	50		

Mechanical Specifications


Connector Type & Quantity	N Female x 2 (Pigtail)	
Connector Position	Bottom	
Antenna Dimension (H x W x D)	(mm in)	Ø200 x 42.5 Ø7.8 x 1.6
Weight (Clamp excl.)	(kg lb)	0.6 1.3
Mounting	Ceiling mount	
Radome (Color)	ASA (White)	
Product Environmental compliance	ROHS compliant	

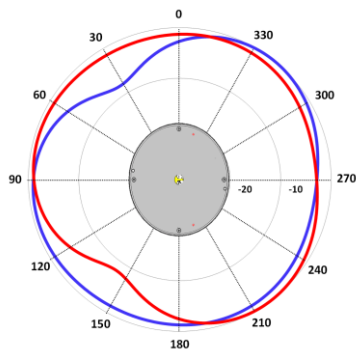

Low Band

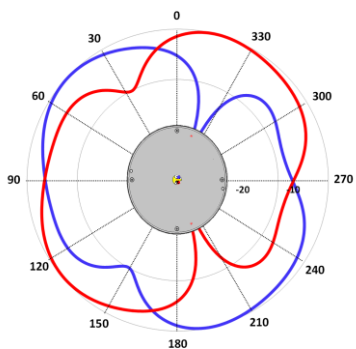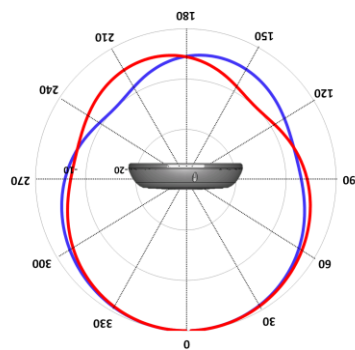

High Band

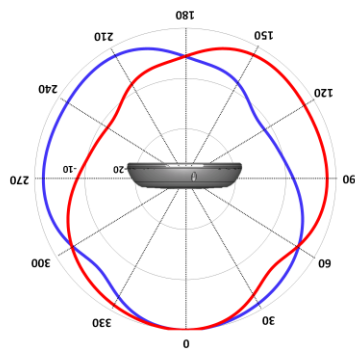

Mechanical Drawing & Configuration Table

