

E000017X65V12D10

Penta Band Antenna with internal replaceable RET

5XPol / 1x 698-960, 4 x 1710-2690 MHz / H65°, H65° / 17 dBi , 18 dBi / 1.5°-12°, 2°-12°

Multi-band Panel	R1	Y1	Y2	Y3	Y4
Frequency Range	698-960	1710-2690	1710-2690	1710-2690	1710-2690
HPBW	65°	65°	65°	65°	65°

Model No.	E000017X65V12D10				
------------------	-------------------------	--	--	--	--

Connectors		R1 Connector 1-2			
		698-862		880-960	
Frequency Range (MHz)		698-806	790-862	880-960	
Gain at mid Tilt (dBi)		16.6	17.1	17.2	

Horizontal Pattern:		698-862		880-960	
Azimuth Beamwidth (°)		69	67	66	
Front-to-Back Ratio (dB)		> 25	> 25	> 25	
Cross Polar Discrimination at Boresight (dB)		> 19	> 20	> 18	
Cross Polar Discrimination over Sector (dB)		> 10	> 9	> 8	

Vertical Pattern:		698-862		880-960	
Elevation Beamwidth (°)		8.5	8	7	
Electrical Down tilt continuously adjustable (°)				1.5 - 12	
Tilt Accuracy (°)		< 0.5	< 0.5	< 0.6	
First Upper Side Lobe Suppression (dB)		> 16	> 16	> 16	

Cross Polar Isolation (dB)		> 28			
Inter band isolation (dB)		> 30			
VSWR		< 1.5			
Polarization		+45°, -45°			
Intermodulation IM3 (dBc)		< -150 (2x43 dBm carrier)			
Impedance (Ω)		50			
Max. Effective Power per Port		250			

Values based on NGMN-P-BASTA requirements

Connectors		Y1-Y4 ,Connector 3-10				
		1710-2690				
Frequency Range (MHz)		1710-1880	1850-1990	1920-2170	2300-2400	2500-2690
Gain at mid Tilt (dBi)		17.1	17.2	17.6	17.9	17.6

Horizontal Pattern:		1710-1880		1850-1990		1920-2170		2300-2400		2500-2690	
Azimuth Beamwidth (°)		67	65	63	61	63		63		63	
Front-to-Back Ratio (dB)		> 25	> 25	> 25	> 25	> 25		> 25		> 25	
Cross Polar Discrimination at Boresight (dB)		> 20	> 24	> 25	> 23	> 19		> 19		> 19	
Cross Polar Discrimination over Sector (dB)		> 12	> 10	> 10	> 8	> 8		> 8		> 8	

Vertical Pattern:		1710-1880		1850-1990		1920-2170		2300-2400		2500-2690	
Elevation Beamwidth (°)		7.1	6.4	6.1	5.4	4.8		4.8		4.8	
Electrical Down tilt continuously adjustable (°)				2-12							
Tilt Accuracy (°)		< 0.3	< 0.3	< 0.3	< 0.3	< 0.3		< 0.3		< 0.3	
First Upper Side Lobe Suppression (dB)		> 16	> 16	> 16	> 16	> 16		> 16		> 16	

Cross Polar Isolation (dB)		> 28				
Inter band isolation (dB)		> 30				
VSWR		< 1.5				
Polarization		+45°, -45°				
Intermodulation IM3 (dBc)		< -150 (2x43 dBm carrier)				
Impedance (Ω)		50				
Max. Effective Power per Port		250 W				

Values based on NGMN-P-BASTA requirements


Mechanical Specifications

Connector Type & Quantity		10 x 7-16 DIN Female or 4.3-10 DIN Female
Connector Position		Bottom
Dimension (H x W x D)	(mm/in)	2700 x 350 x 160 106.2 x 13.7 x 6.2
Weight	(kg/lb)	47 103.6
Wind Load (@100 mph)	(N)	Front 1344, Side 615, Rear 1344
Max. Wind Speed	(mph)	150
Operation temperature	(°)	- 40 - 70
Radome (Color)		ASA + PC (Gray)
Product Environmental compliance		ROHS compliant

Remote Electrical Tilt (RET)

Internal RET	ACS-RP100 (Internal Replaceable RET)
Protocol	3GPP/AISG 2.0

Bottom view

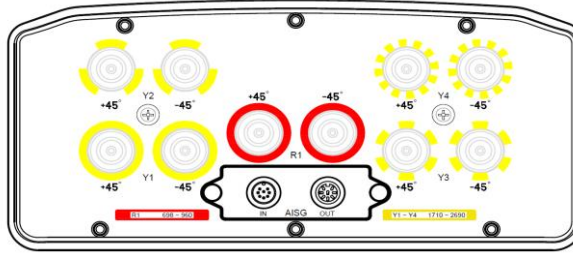

R1	698-960 MHz
Y1, Y2, Y3, Y4	1710-2690 MHz

Mechanical Drawing & Configuration Table

