Pseudo Omni Canister Fixed Antenna

(2x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz

14-Port

DOYZ9X360F14



Features & Applications

· Small Cell Pseudo Omni Canister Fixed Antenna

· 4-port x 698-894MHz, 4-port x 1695-2400MHz, 4-port x 3550-4000MHz, 2-port x 5150-5925MHz

· HPBW : 360 °

· Gain : 3.7 dBi, 8.2 dBi, 6.6 dBi, 5.4 dBi

*This antenna is UNII-1 Compliance @ 1W input power. Guidance for compliance of U-NII devices under Part 15, Subpart E of the FCC rules.

ELECTRICAL SPECIFICATIONS			
Port Information	-	R1-R2	
Frequency Range	(MHz)	**698-806**	**806-894**
Gain	(dBi)	3.6	3.8
Horizontal Pattern			
Azimuth Beam width	(°)	360	
Gain OMNI Deviation	(dB)	5	
Vertical Pattern			
Elevation Beam width	(°)	65.4	64.7
First Upper Side Lobe Suppression	(dB)	10	

GENERAL SPECIFICATIONS		
In-Band Cross Polar Port Isolation	(dB)	>20
Inter-Band Port Isolation	(dB)	>25
VSWR	-	1.5 : 1
Polarization	-	±45°
Intermodulation IM3	(dBc)	-153(3rd Order, 2x20W)
Impedance	(Ω)	50
Max. Effective Power per Port	(Watts)	100

July, 2020 Copyright (c) 2019 GAMMA NU, INC. All rights reserved. Revision 2

Pseudo Omni Canister Fixed Antenna

(2x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz

14-Port


ELECTRICAL SPECIFICATIONS

Port Information	-	Y1-Y2				P1-P2	O1
Frequency Range	(MHz)	**1695-1850**	**1850-1910**	**1910-2180**	**2300-2360**	**3550-4000**	**5150-5925**
Gain	(dBi)	7.9	8.1	8.3	8.6	6.6	5.4
Horizontal Pattern							
Azimuth Beam width	(°)	360					
Gain OMNI Deviation	(dB)	4.5	5	5	6	7	7
Vertical Pattern							
Elevation Beam width	(°)	24.1	25	23.9	23.8	26.3	25.2
First Upper Side Lobe Suppression	(dB)	12	10	10	10	8	8

GENERAL SPECIFICATIONS

In-Band Cross Polar Port Isolation	(dB)	>20					
Inter-Band Port Isolation	(dB)	>25					
VSWR	-	1.5 : 1				1.5 : 1(Typ.) 1.7 : 1(Max)	1.5 : 1(Typ.) 1.7 : 1(Max)
Polarization	-	±45°					
Intermodulation IM3	(dBc)	-153(3rd Order, 2x20W)				-	-
Impedance	(Ω)	50					
Max. Effective Power per Port	(Watts)	100				100	1

Array Information



Up

Down

Array	Frequency(MHz)	Connectors
R1-R2	698-894	1-4
Y1-Y2	1695-2400	5-8
P1-P2	3550-4000	9-12
O1	5150-5925	13-14

The parameters Based on the NGMN P-Basta definition and recommendation.


Copyright (c) 2019 GAMMA NU, INC. All rights reserved.


Pseudo Omni Canister Fixed Antenna


(2x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz

14-Port

Outline

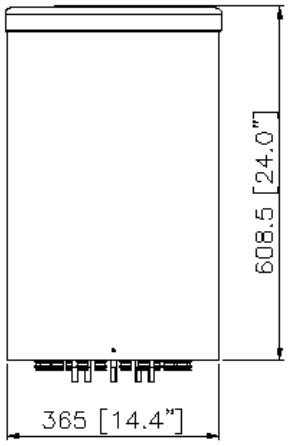

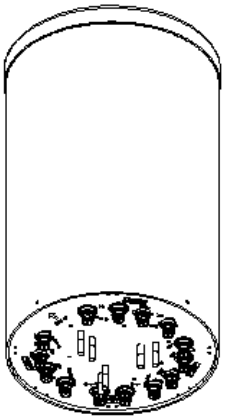

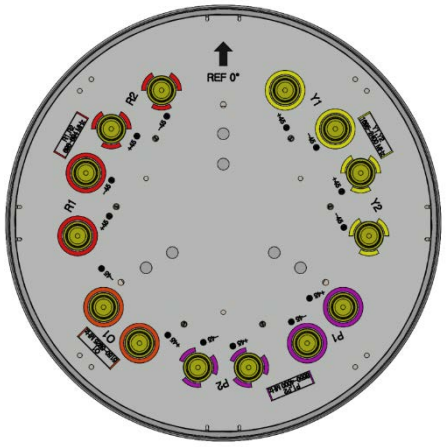

Bottom

MECHANICAL SPECIFICATIONS		
Connector Type & Quantity	-	14 x 4.3-10 Female
Connector Position	-	Bottom
Antenna Dimension (D x H)	(inch / mm)	Ø 14.4 x 24 / Ø 365 x 610
Weight (without Mounting Kit)	(lb / kg)	31.3 / 14.2
Wind Load (@100 mph)	(N)	316
Max.Wind Speed (Survival Wind Speed)	(km/s)	150
Radome (Color)	-	FRP (Gray)


Copyright (c) 2019 GAMMA NU, INC. All rights reserved.

Psuedo Omni Canister Fixed Antenna


(1x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz

14-Port

Pattern File_698-894 MHz




Horizontal




Vertical

Pattern File_1695-2400 MHz




Horizontal




Vertical

Pattern File_3550-4000 MHz




Horizontal




Vertical

Pattern File_5150-5925 MHz



Horizontal



Vertical

The parameters Based on the NGMN P-Basta definition and recommendation.


Copyright (c) 2019 GAMMA NU, INC. All rights reserved.


Pseudo Omni Canister Fixed Antenna


(2x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz


14-Port


Bottom Plate Draft

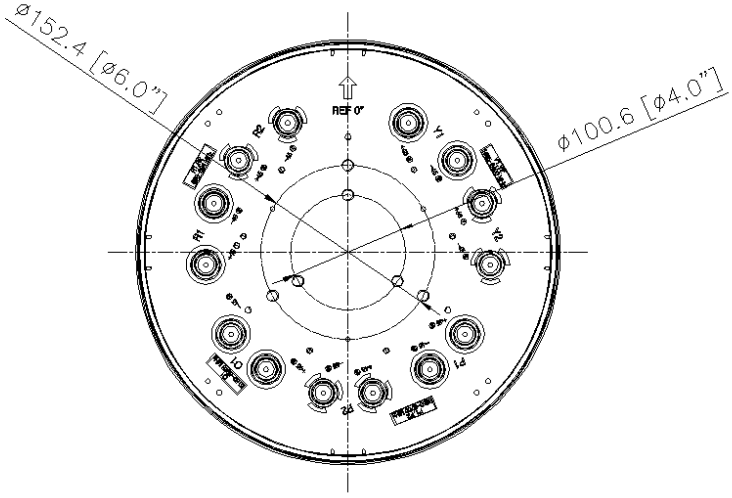

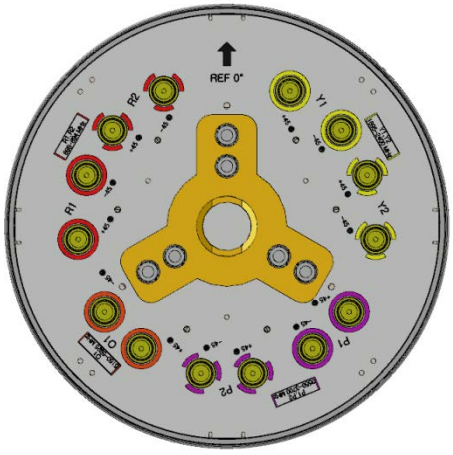

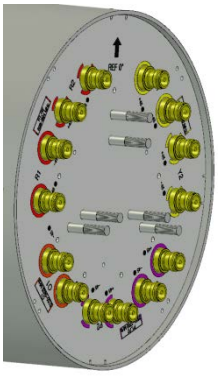

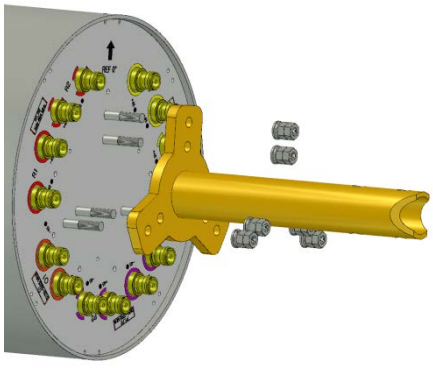

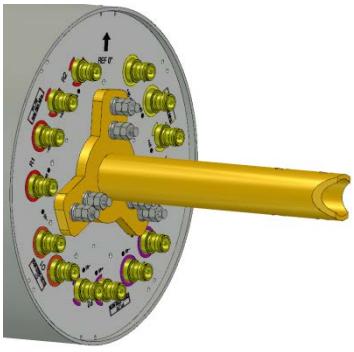

The parameters Based on the NGMN P-Basta definition and recommendation.


Copyright (c) 2019 GAMMA NU, INC. All rights reserved.

Pseudo Omni Canister Fixed Antenna

(2x) 698-894 MHz
(2x) 1695-2400 MHz
(2x) 3550-4000 MHz
(1x) 5150-5925 MHz

14-Port

Ordering Options for Mounting Kits — **Mounting bracket kits are not included.**

Part Number	Picture	Description
Optional GN-ADPT-01 HP Communications Inc.		Mounting Bracket for 6-bolt star pattern 
Optional 900192 ConcealFab Corporation		Cantenna Sleeve, Universal
Optional Concealment Enclosure CommScope		Pole Top Radio Concealment Antenna Mount SSC-760236966E13x : PT12 ERICSSON SSC-760236966E23x : PT12 LAA/CBRS - ERICSSON SSC-760241465N43x : PT12 LAA/CBRS - NOKIA

The parameters Based on the NGMN P-Basta definition and recommendation.

Copyright (c) 2019 GAMMA NU, INC. All rights reserved.





Thank you for your Consideration !

gamma nu
PIM FREE ANTENNA

Head Office in Korea

185- 44, Geumgok-ro, Dongtan-myeon, Hwaseong-si, Gyeonggi-do, Korea
Tel: +82) 31.831.8800~7
sales@gammanu.com

U.S Office

151 N. Kraemer Blvd, Suite# 205 Placentia CA 92870
T.(800) 909. 5221, F.(714) 646. 9908
gnt.sales@gammanu.com